




VDF HYUNDAI N800A00100  
-3L-0087-5+BM2Y+IP21+EMC2  
Cod; 50770767012


Supply Voltaje ; 380-500v 3p  
Power Kw ; 45  
Power HP ; 60  
Normal Duty ; 87 Amp.  
Heavy Duty ; 72 Amp.  
Kg ; 37,5

Terminal	Signal
1	+10 Vref
2	Reference output
3	A1+
3	Analog input voltage or current
4	A1-
4	Analog input common (current)
5	A2+
5	Analog input voltage or current
6	A2-
6	Analog input common (current)
7	24Vref
7	24V auxiliary voltage
8	GND
8	I/O ground
9	DI1
9	Digital input 1
10	DI2
10	Digital input 2
11	DI3
11	Digital input 3
12	CM
12	DI-DisCOMMON
13	24Vref
13	24V auxiliary voltage
14	GND
14	I/O ground
15	DI4
15	Digital input 4
16	DI5
16	Digital input 5
17	DI6
17	Digital input 6
18	CM
18	DI-DisCOMMON
19	AO1+
19	Analog output common/ I/O ground
20	AO1-/GND
20	Analog output common/ I/O ground
21	+24Vref
21	24V auxiliary input voltage
A	RS485
A	Serial bus, negative
B	RS485
B	Serial bus, positive
21	RO1 NC
22	RO1 CM
23	RO1 NO
24	RO2 NC
25	RO2 CM
26	RO2 NO
27	RO3 CM
28	RO3 NO
29	RO3 NC
30	RO3 CM
31	RO3 NO
32	RO3 NC
33	RO3 CM
34	RO3 NO

MR7

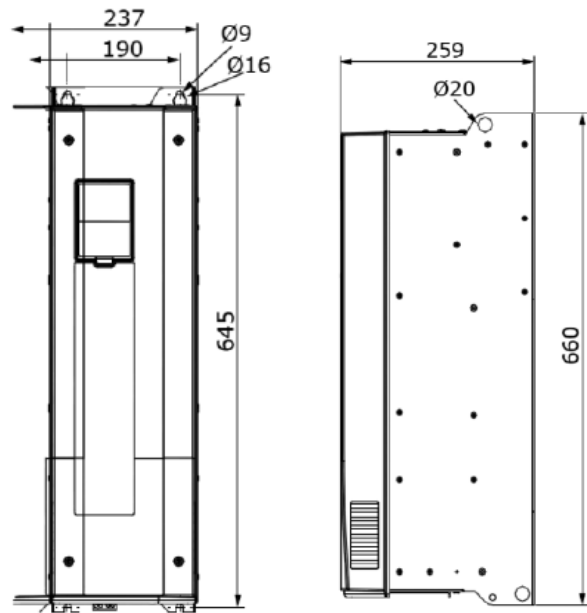

IP21



IP54

