




**Barrera Infrarroja Molik
110 Volts.**

Cod: 20610764414

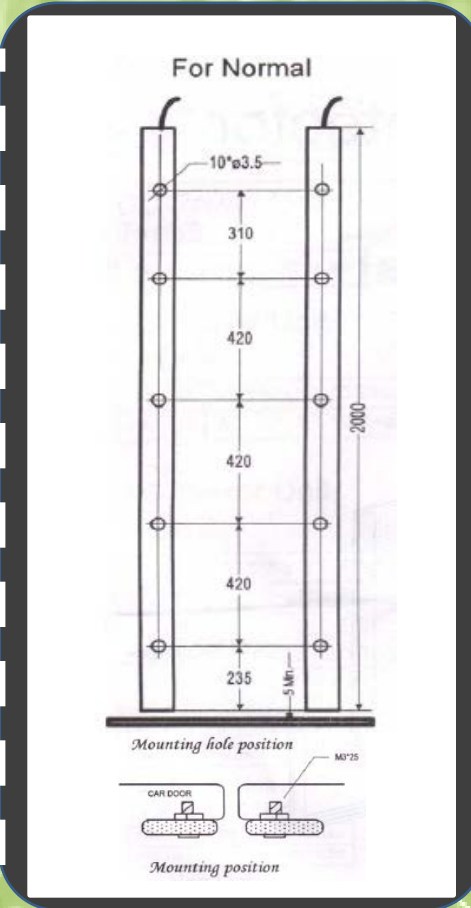

Number of beams(MAX)	128
Detector dimension	2000*38*10mm
Response time(MS)	65
Diodes spacing	59mm
Range of detection	0~3000mm
Active protection height	20~1841mm
Vertical mounting tolerance	+/- 10mm/10°
Horizontal mounting tolerance	+/- 5mm/7°
Light immunity(LUX.)	100000
Operating temperature	-20℃ —— + 65℃
LED indicators	Green:power supply; Red:signal indicators
Signal output	Relay contact, 1NO/1NC
Buzzer in receive	15s after beam obstructed continuously
Power consume	3w
Voltage of the control box	AC220V / AC110V / DC24V
System marking	CE