




Barrera Infrarroja Molik 220 Volts. Eco.

Cod: 20610764029

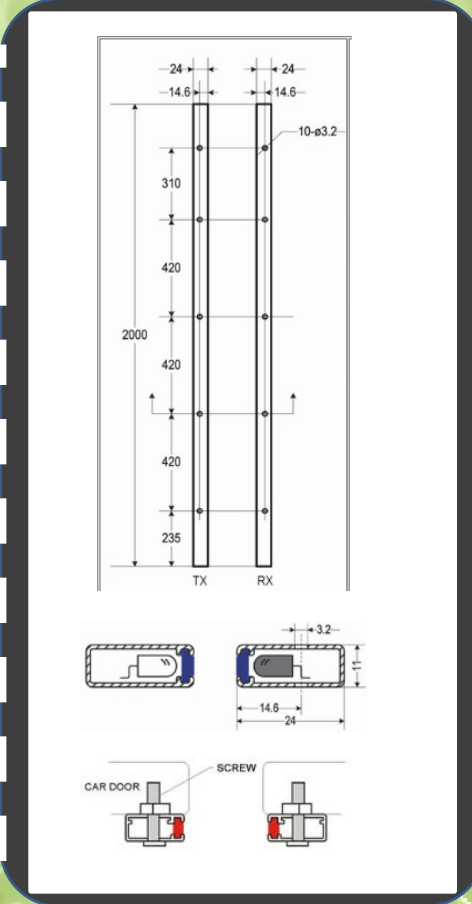

Number of beams(Max.)	84
Operating environment	-20°C — +85°C
Light Immunity	≤100000Lux
Vertical tolerance	+/- 10mm, 7°
Horizontal tolerance	+/- 3mm, 5°
Dimensions	H2000mm*W24mm*D11mm
Detecting height	20mm-1841mm
Detecting range	0-2m
Response time	36.5ms
Power consumption	≤4W or 100Ma @ DC24V
Signal output	Relay output (AC220V, AC110V, DC24V) or Transistor output (NPN, PNP)
LED power Indicator in receiver	Green LED when it is detecting
LED status Indicator in receiver	Red LED when it is detecting
Number of diodes	17pairs(34pcs)
Infra red diodes range	117.5mm
Voice reminder	Buzzer In RX, after continuous detection for 15s, buzzer On
EMC	EN12015, EN12018
Vibration	20 to 500Hz 4 hours per X-Y-Z axis Sinuoidal vibration 30Hz rms 30mins Per X-Y-Z axis
Protection Level	IP54(TX, RX), IP31(Power box)
Certificate	CE
Quality Warranty	12months after shipping