




Fuente De Poder.
24Vdc-4,5A.

Cod: 20110767014

TECHNICAL DATA	
DC VOLTAGE	24V
RATED CURRENT	4.5A
CURRENT RANGE	0~4.5A
RATED POWER	108W
RIPPLE&NOISE (MAX)	120mVp-p
VOLTAGE ADJ. RANGE	22.8 ~ 26.4V
VOLTAGE TOLERANCE	±1.0%
LINE REGULATION	±0.5%
LOAD REGULATION	±0.5%
SETUP,RISE TIME	500ms,20ms/230VAC 1200ms,30ms/115VAC at full load
HOLD UP TIME	100ms/230VAC 18ms/115VAC at full load
VOLTAGE RANGE	88 ~ 264VAC 125~374VDC (Whitstand 300VAC surge for 5sec.Without damage.
FREQUENCY RANGE	47 ~ 63 HZ
EFFICIENCY	84%
AC CURRENT	2.5A/115VAC 1.5A/230VAC
INRUSH CURRENT	COLD START 40A/230VAC
LEAKAGE CURRENT	<2ma /240VAC
OVERLOAD	110~150% rated output power (protection type: Hiccup mode,recovers automatically after fault condition is removed)
OVER VOLTAGE	27.6~32.4V (Protection Type : Hiccup mode recovers Automatically after fault condition is removed)

Dimensiones.

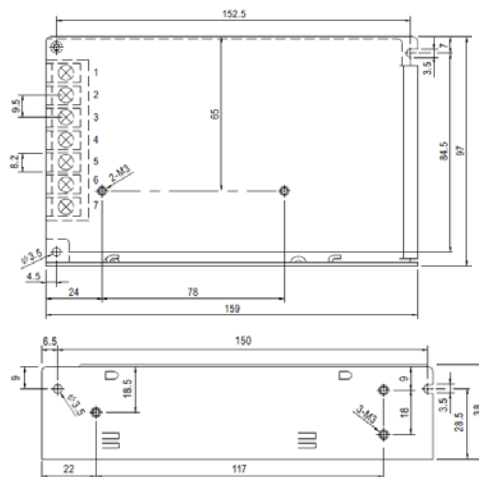

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4,5	DC OUTPUT -V
2	AC/N	6,7	DC OUTPUT +V
3	FG		

Diagrama.

