




VDF HYUNDAI N800A00100
-3L-0005-5+BM2Y+IP21+EMC2

Cod; 50770767002


Supply Voltage ; 380-500v 3p
Power Kw ; 2,2
Power HP ; 3,0
Normal Duty ; 5,6 Amp.
Heavy Duty ; 4.3 Amp.
Kg ; 6,00

Terminal	Signal
1 +10 Vref	Reference output
2 AI1+	Analog input, voltage or current
3 AI1-	Analog input common, (current)
4 AI2+	Analog input, voltage or current
5 AI2-	Analog input common, (current)
6 24Vref	24V auxiliary voltage
7 GND	I/O ground
8 DI1	Digital input 1
9 DI2	Digital input 2
10 DI3	Digital input 3
11 CM	DI-DECOMMON
12 24Vref	24V auxiliary voltage
13 GND	I/O ground
14 DI4	Digital input 4
15 DI5	Digital input 5
16 DI6	Digital input 6
17 CM	DI-DECOMMON
18 AO1+	Analog output (current)
19 AO1-/GND	Analog output common/ I/O ground
20 +24Vref	24V auxiliary input voltage
A RS485	Serial bus, negative
B RS485	Serial bus, positive
21 RO1 NC	Relay output 1
22 RO1 CM	
23 RO1 NO	Relay output 2
24 RO2 NC	
25 RO2 CM	Relay output 3
26 RO2 NO	
27 RO3 CM	Relay output 3
28 RO3 NO	

MR4

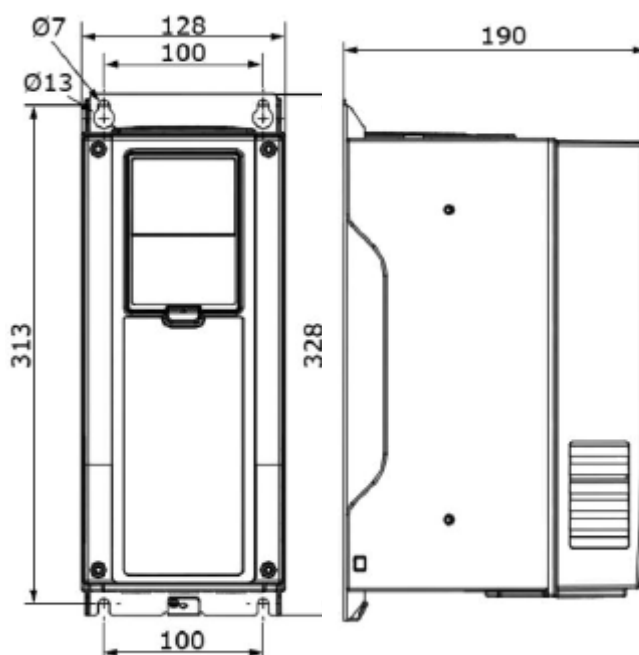

IP21

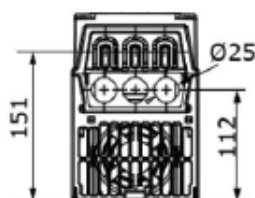

IP54

