




VDF HYUNDAI N800S0020  
-1L-0004-2+BM3Y+IP20  
Cod; 50660766002

Supply Voltaje ; 208-240v 1p  
Power Kw ; 0,75  
Power HP ; 1,0  
Normal Duty ; 5,6 Amp.  
Heavy Duty ; 3,7 Amp.  
Kg ; 0,70

Terminal	Signal
1	+10 Vref
2	Reference output
3	A1+
3	Analoge input, voltage or current
4	A1-
4	Analoge input, common, (current)
5	A2+
5	Analoge input, voltage or current
6	A2-
6	Analoge input, common, (current)
7	24Vref
7	24V auxiliary voltage
8	GND
8	I/O ground
9	DI1
9	Digital input 1
10	DI2
10	Digital input 2
11	DI3
11	Digital input 3
12	CM
12	DI-DECOMMON
13	24Vref
13	24V auxiliary voltage
14	GND
14	I/O ground
15	DI4
15	Digital input 4
16	DI5
16	Digital input 5
17	DI6
17	Digital input 6
18	CM
18	DI-DECOMMON
19	AD1+
19	Analoge input (current)
20	AO1-/GND
20	Analoge output, common/ I/O ground
21	+24Vref
21	24V auxiliary input voltage
A	RS485
A	Serial bus, negative
B	RS485
B	Serial bus, positive
21	RO1 NC
22	RO1 CM
23	RO1 NO
24	RO2 NC
25	RO2 CM
26	RO2 NO
27	RO3 CM
28	RO3 NO

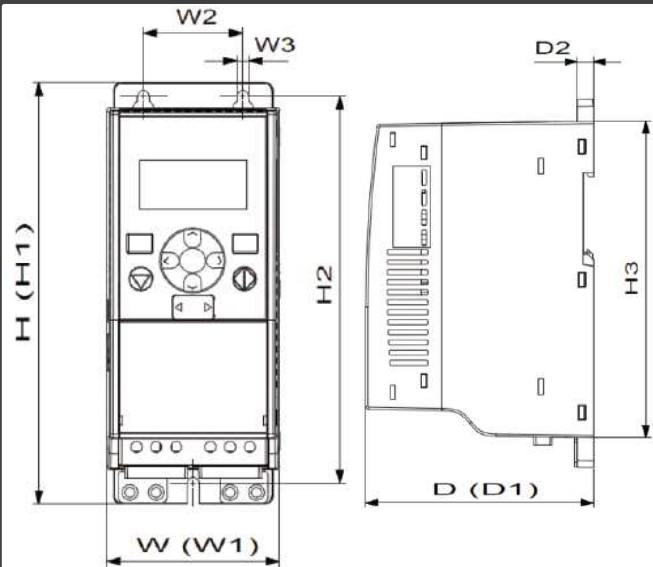

Frame	H1	H2	H3	W1	W2	W3	D1	D2
M12	195	183	170	90	62.5	5.5	101.5	7
M14	370	360.5	336.5	165	140	7	165	7
M16	414	398	383	165	140	7	202	7